

Adjusting Fine Tuner Screw in the Tilt Base (Wrist Joint)

Step 1



**Tilt Base
(Wrist Joint)**

Poke a hole through center of sticker with 1/16" hex wrench. Locate fine tuner screw with the wrench end.

Step 2




Turn fine tuner screw to left or right in tiny increments - then test

WARNING: screw is only 1/4" long and can drop out of threaded insert if turned too much in either direction!

Turn left/counter clockwise - loosen to lock. Once it locks in place stop loosening or screw will drop out.

Turn right/clockwise - tighten to not lock. Too tight and joint will skip over down lock tabs.

Detail

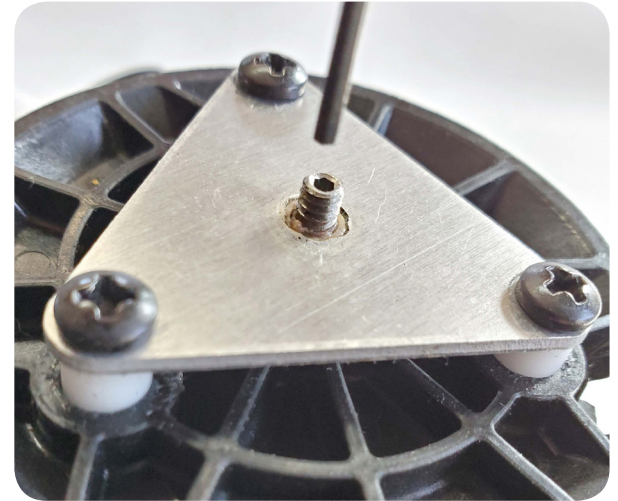

Close up of 1/16" hole in fine tuner screw

Showing internal workings of wrist. **Do not** remove tilt base.